

HEAVY DUTY STUD TYPE CAM FOLLOWER - NUKR.. SYLB®

Stud:


Alloy steel, hardened, ground,
with grease hole

Ring:

Bearing steel, hardened, ground, polished,
Full complement roller set,
with acalabyrinth seals on both sides

螺栓: 合金钢, 淬火, 磨加工, 有油孔

外圈: 轴承钢, 淬火, 磨加工, 抛光, 满滚子配置, 两侧密封

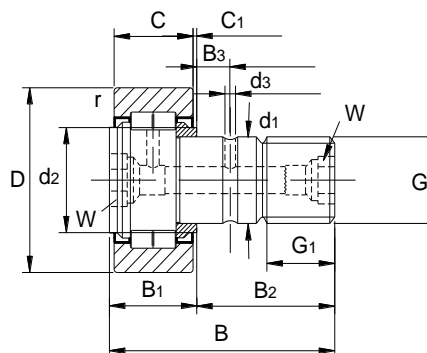

Bearing No.	Dimensions in millimeters														Properties						Weight		
型号	尺寸 mm														性能						重量		
	D	d1	B	B1	B2	B3	C	C1	d2	d3	G	G1	r	W	MA	Crw	Corw	Fr per	For per	Curw	NDG		
		h7		max									min		Nm	KN	KN	KN	KN	KN	KN	1/min	≈kg
NUKR 35	35	16	52	19.6	32.5	7.8	18	0.8	20	3	M16×1.5	17	0.6	8	58	15.3	16.8	8.6	16.8	2.22	6,500	0.164	
NUKR 40	40	18	58	21.6	36.5	8	20	0.8	22	3	M18×1.5	19	1	8	87	18.4	22.6	13.1	22.6	2.9	5,500	0.242	
NUKR 47	47	20	66	25.6	40.5	9	24	0.8	27	4	M20×1.5	21	1	10	120	28	35	16.4	33	4.4	4,200	0.38	
NUKR 52	52	20	66	25.6	40.5	9	24	0.8	31	4	M20×1.5	21	1	10	120	29	37.5	17.3	34.5	4.7	4,200	0.45	
NUKR 62	62	24	80	30.6	49.5	11	28	1.3	38	4	M24×1.5	25	1	14	220	40	50	23.5	46.5	6.3	2,600	0.795	
NUKR 72	72	24	80	30.6	49.5	11	28	1.3	44	4	M24×1.5	25	1.1	14	220	44.5	60	32	60	7.6	2,600	1.02	
NUKR 80	80	30	100	37	63	15	35	1	47	4	M30×1.5	32	1.1	14	450	69	98	47.5	96	12.1	1,800	1.6	
NUKR 90	90	30	100	37	63	15	35	1	47	4	M30×1.5	32	1.1	14	450	79	117	77	117	14.4	1,800	1.96	

W: Nominal dimension for hexagonal socket

MA: Nut tightening torque

Crw: Effective dynamic load rating as track roller (radial)

Corw: Effective static load rating as track roller (radial)

Fr per: Permissible dynamic radial load

For per: Permissible static radial load

Curw: Fatigue limit load

NDG: Speed (for continuous operation and grease lubrication)