

**Outer ring:**

Zinc base alloy

**Ball stud:**


Free-cutting carbon steel

**Sliding contact surface:**

Steel/zinc alloy, requiring maintenance

球头座: 锌合金带橡胶密封

球头螺栓: 碳钢

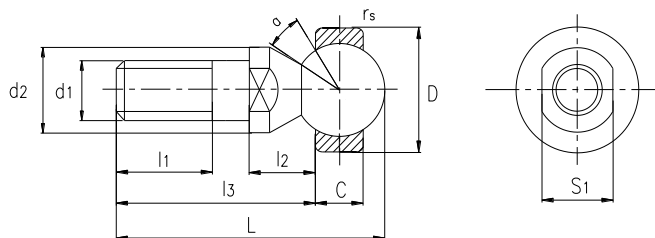

Bearing No.	Dimensions millimeters											Load	Weight
型号	尺寸 mm											静负荷	重量
	d1	d2	l1	l2	l3	L	S1	C	D	rs	$\alpha$	stat.	
	6g		min							min		KN	≈kg
SQD 5	M5	9	8	8	19	27.5	7	6	16	0.3	25	2	0.014
SQD 6	M6	10	11	8.8	23.8	33.5	8	6.75	18	0.3	25	3.2	0.021
SQD 8	M8	12	12	11.6	28.6	41	10	9	22	0.3	25	5.7	0.042
SQD 10	M10×1.25	14	15	14.2	34.2	49	11	10.5	26	0.3	25	9.2	0.067
SQD 12	M12×1.25	17	17	15.1	38.1	55.1	15	12	30	0.5	25	14	0.108
SQD 14	M14×1.5	19	22	16.8	51.3	70.7	17	13.5	34	0.5	20	19	0.167
SQD 16	M16×1.5	22	23	18	54.5	76.3	19	15	38	0.5	20	26	0.238